
MODEL 163.136 /154 /172 #A as of 145273,
163.136 /154 /172 #X as of 708319,
163.113 /128 /157 /174 /175

1 Torx bolts
2 Cover
3 Locking lever
X58/1 Interior socket

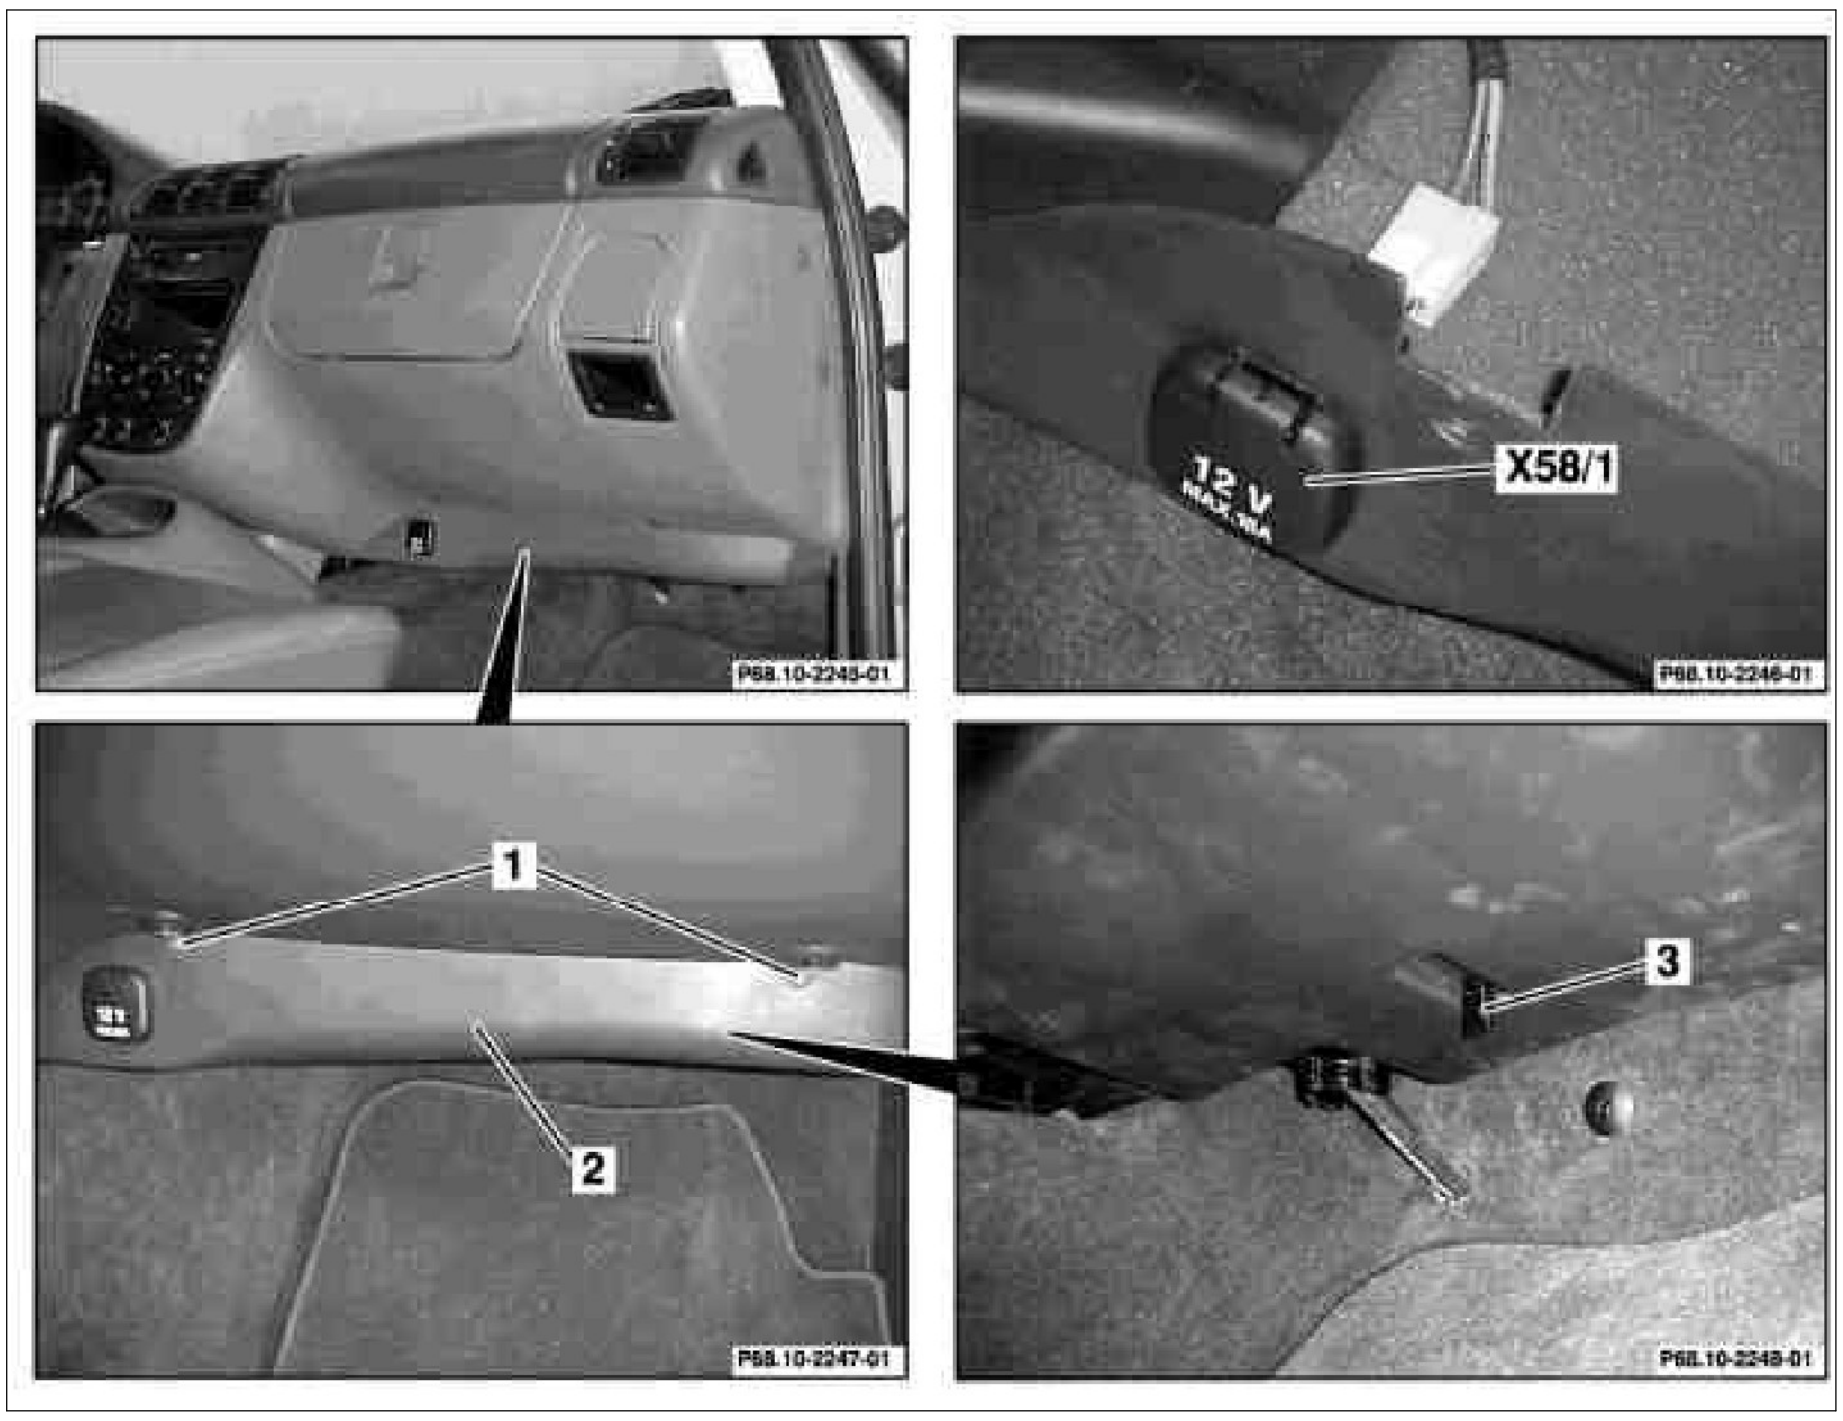

P68.10-2249-06

	Remove/Install		
1	Unscrew Torx screws (1) form cover (2)		
2	Fold locking lever (3) downward		
3	Pull cover (2) downward and lay down		
4	Disconnect electrical connector from interior socket (X58/1)		
5	Install in the reverse order		